Sl. No	Description	Unit	No.	L	B	D	Qty	Rate	Amount
7	Lead for Disposal of Debris shall be payable at carriage rates by Mechanical means inlcuding loading and unloading. From 0.00 to 2.00 Km (Page No.123)								
	Qty vide item No. 1*0.85	Cum					241.56	101.12	24428.00
	Basic rate for haulage of materials as per item no.17.4 page 136) Rs. 2.00								
	Average weight of earth 1.28 tonne / kg for 2.00X1.28X15.00	38.40							
	Add loading and unloading Vide item no.17.1 P.no.134	57.00							
		95.40							
	Area Weightage @ 6%	5.72							
	Total	101.12							
8	Sub Total-1								**1778942.0**
9	Add GST charges at 12%						**12.00**		213473.00
10	Miscellaneous & Rounding off							L/S	7585.00
	Total Rs								**2000000.00**

CERTIFICATE:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per P.W.D S.R of 2018-19
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.
5 This work has not been taken previously under any other grant.

Assistant Engineer
Ward no. 08
Kodigehalli

Assistant Executive Engineer
Kodigehalli Sub Division
BBMP

Executive Engineer
Byatrayanapura Division
BBMP
25/07

Administrative Approval

Accorded For .....
Head of A/C P1771
CER NO 81 **Dt:** 25.07.19

TA CE (YNK)

TECHNICAL SANCTION

Accorded For Rs. Twenty lakhs only

Head of A/c P-1771

Div. Ref. No. 78 Date

AE

EE(BTP)

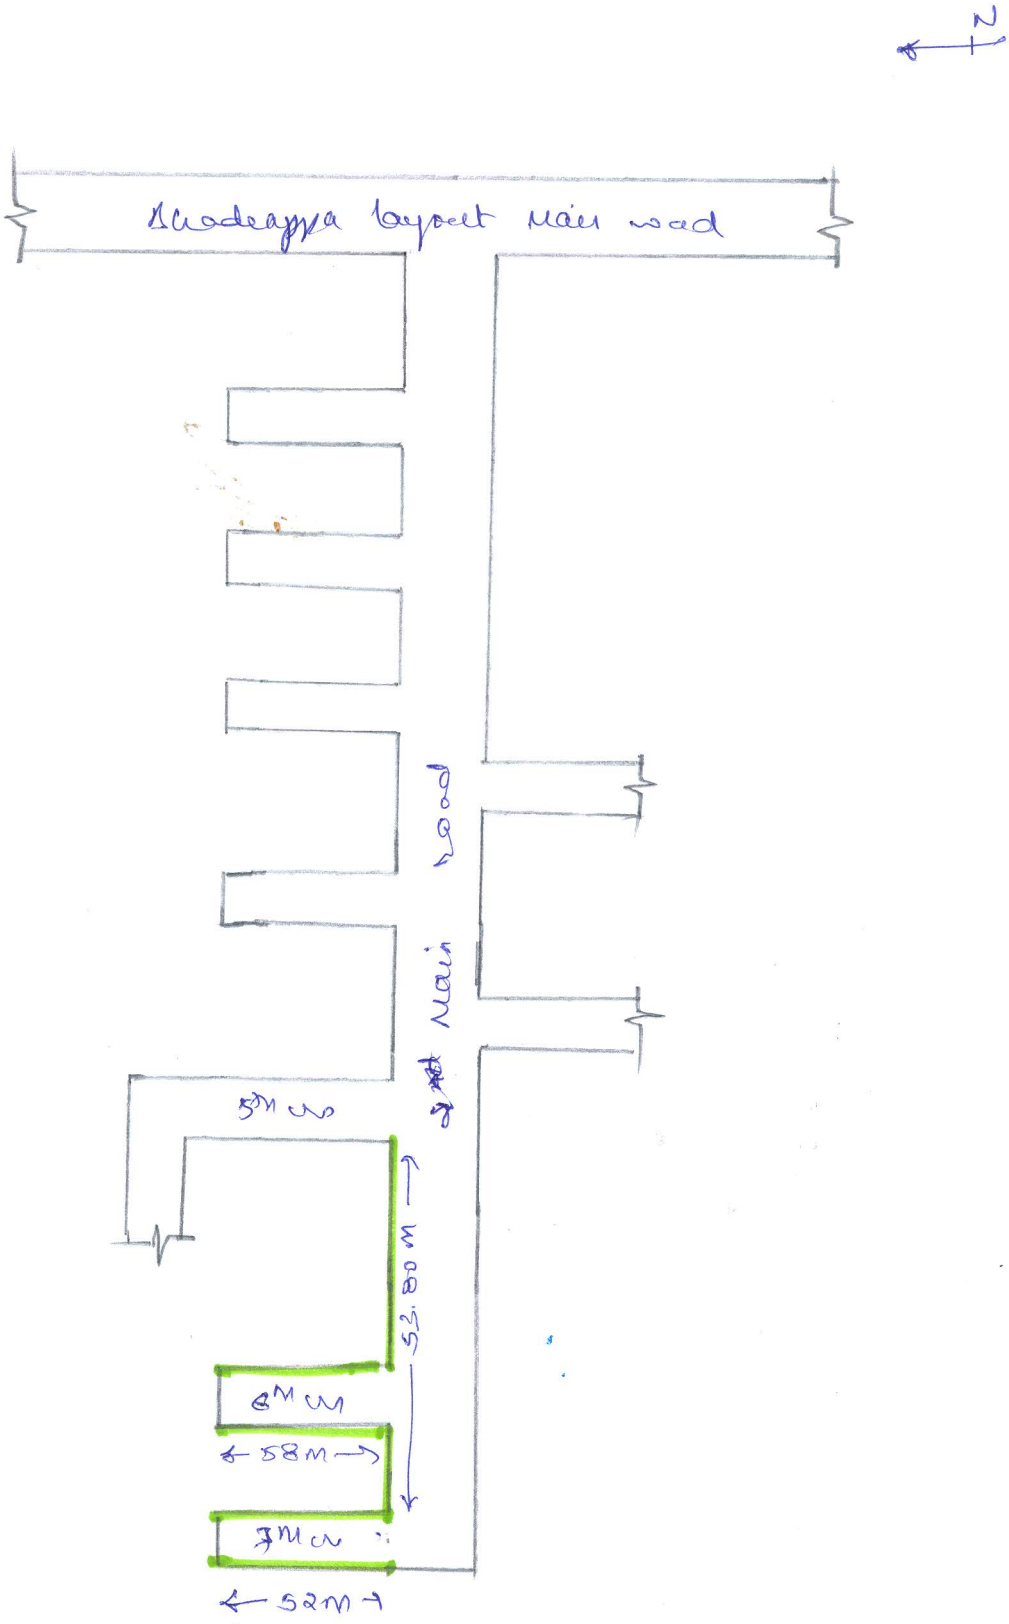

Assistant Executive Engineer
Kodigehalli Sub Division,
Yelahanka Zone, B.B.M.P.
Bangalore.